



NGK Wire Grips

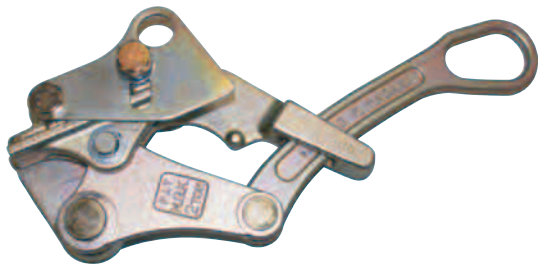

Middle L-Grip


Uses:
For copper cable, covered conductor and messenger wire.



Safe Working Load	Min. Cable Dia. mm	Max. Cable Dia. mm	Weight kg
20kN (2.0t)	5	25	1.8

Large L-Grip

Uses:
For copper cable and covered conductor.



Safe Working Load	Min. Cable Dia. mm	Max. Cable Dia. mm	Weight kg
20kN (2.0t)	16	32	2.1

NGK Ratchet Pullers

Models N-1000P & N-1500P
1.5m Pull

FEATURES:

- Insulated handle
- Handle rotates full 360°



Model	Capacity kN - t	Strap Size mm	Min. Length mm	Max. Length mm	Lever Length mm	Wt. kg
N-1000P	10 (1.0)	2 x 33	440	1910	400	3.3
N-1500P	15 (1.5)	2 x 40	470	1940	475	4.6



SYDNEY
Phone: (02) 9531 8033
Fax: (02) 9531 7933
Email: sales@hesnsw.com.au
www.hesnsw.com.au

MELBOURNE
Phone: (03) 9480 5577
Fax: (03) 9480 0855
Email: sales@hesvic.com.au
www.hesvic.com.au


ADELAIDE
Phone: (08) 8244 7611
Fax: (08) 8244 7699
Email: sales@schillings.com.au
www.schillings.com.au

PERTH
Phone: (08) 9355 4218
Fax: (08) 9472 7970
Email: sales@heswa.com.au
www.heswa.com.au



ABC Grip

Uses:
For aerial bundled cable.




Safe Working Load	Min. Cable Dia. mm	Max. Cable Dia. mm	Weight kg
8.5kN (0.85t)	4 x 35	4 x 95	3.0



SD L-Grip

Uses:
For steel rod, copper cable and messenger wire.



Safe Working Load	Min. Cable Dia. mm	Max. Cable Dia. mm	Weight kg
10kN (1.0t)	2.6	15	0.6



NGK Ratchet Wrench

Model BY-3

Four different sizes in one

FEATURES:

- Insulated handle

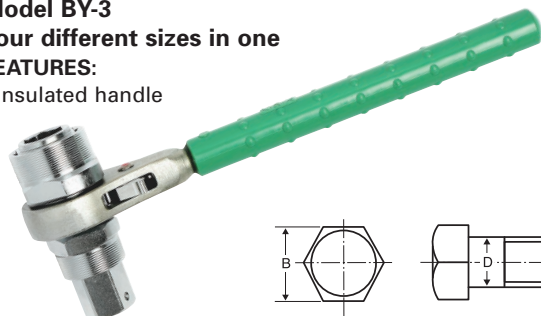

Model BY3	D mm	10	12	16	20	Wt. kg
	B mm	17	19	24	30	0.9