

Stainless Steel Load Brake Winches

Capacities: 545kg, 820kg & 1200kg (Pulling)


Or Blok

FEATURES

- Compact design
- Stainless steel construction Grade 304
- Automatic braking system - no free wheeling under load
- Fully enclosed gear train
- Suitable for marine environments
- Minimum handle effort to lift or pull W.L.L. (Working Load Limit).
- Convenient fixing points in base
- Easy attaching of wire rope



COMPLIES WITH AS1418.2

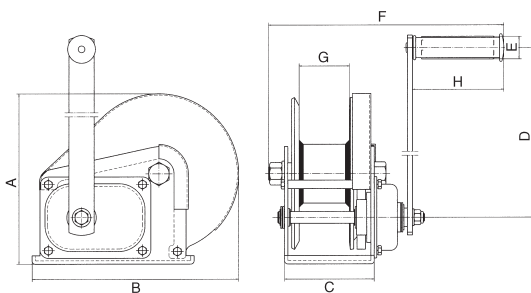

Model	OSSBW545	OSSBW820	OSSBW1200	
W.L.L. Lifting	270	410	600	
kg Pulling	545	820	1200	
Test Load	800	1230	1800	
kg Gear Ratio	4.2:1	5:1	10:1	
Dimensions mm	A	156	203	216
	B	184	256	293
	C	88	107	127
	D	210	319	319
	E	27	27	27
	F	272	283	305
	G	51	60	63
	H	109	109	109
Net weight	3.7	7.7	10.1	
kg Volume	cm	16 x 16 x 22	35 x 20 x 23	35 x 24 x 24

Load Brake Winches

Capacities: 500kg and 1 tonne

TITAN

FEATURES

- Compact design
- Suits a wide range of lifting purposes
- Use in vertical or horizontal position
- Wall or floor mounted
- Load brake automatically suspends the load when handle winding ceases



COMPLIES WITH AS1418.2

Capacity tonnes	Drum Dia. mm	Max. Rope Capacity	Handle Turns to Lift 1m	Brake Type	Handle Length mm	Effort to Lift Rates Load kg	Weight kg
0.5	102	27.5m x 8mm W/R	21.5	Automatic braking system No free wheeling under load.	305	16	23
1	140	40m x 13mm W/R	53	Automatic braking system No free wheeling under load.	235	16	45